

GM5000

GM5000

Extrusion blow moulding machines

Clamping force: 96 kN

Product volumes: 0,2—10,0 l


Shuttle stroke: 380 mm / 440 mm (W)

GM 5001 E - Single station / Electric

GM 5002 E - Double station / Electric

General information	Single station machine	Double station machine
Dimensions (Width/Length/Height)	2000/4000/3200 mm	3000/4600/3200 mm
Weight	4600 kg	7000 kg
Extruder information	Single station machine	Double station machine
Screw diameter	60 mm	80 mm
Extruder drive output	22 kW	55 kW
Extruder output HD-PE	70 kg/h	140 kg/h

Mould dimensions (mm)

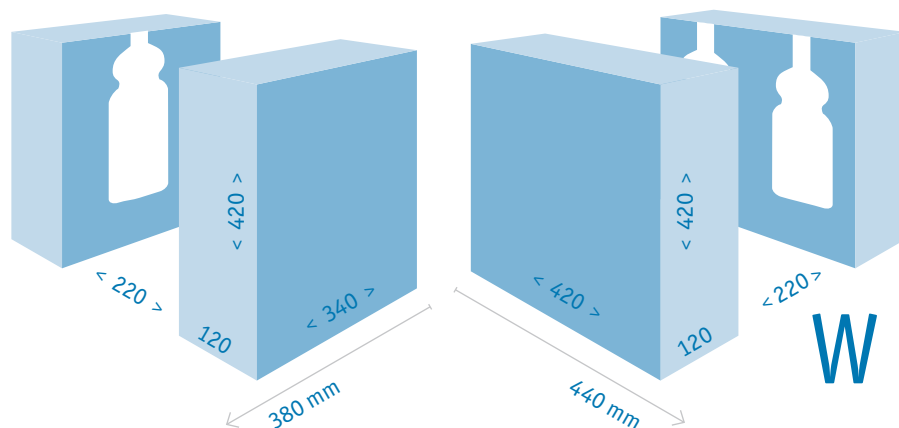

	2 Cavities	3 Cavities	4 Cavities	5 Cavities
Standard center distance	130 mm	110 mm	70 mm	-
Standard center distance W	180 mm	125 mm	100 mm	70 mm

Technical modifications reserved; Alternative center distances available;
Ask for additional equipment. For more information scan QR code or visit website:

www.gdk.cz



In de Benelux vertegenwoordigd door **Kotraco Plastic Machinery**

Korte Schaft 23 C • 3991 AT Houten

+31 30 635 0603 • info@kotraco.eu • www.kotraco.eu

