

MINI DRYER X COMB XD15 ÷ XD18




Features

Model	Hopper capacity				Electrical power		Weight	
	dmc	cft	kg *	lb *	kW	HP	kg	lb
XD15	48	1,70	28,8	63,5	3,7	5,0	75	165
XD16	60	2,12	36,0	79,4	3,7	5,0	79	174
XD17	80	2,83	48,0	105,8	3,7	5,0	91	201
XD18	120	4,24	72,0	158,7	3,7	5,0	96	212

Standard power supply: **400V/3ph/50-60Hz**

* Bulk density 0,6 kg/dmc - 37,5 lb/cft

MINI DRYER **X COMB** **XD15 ÷ XD18**

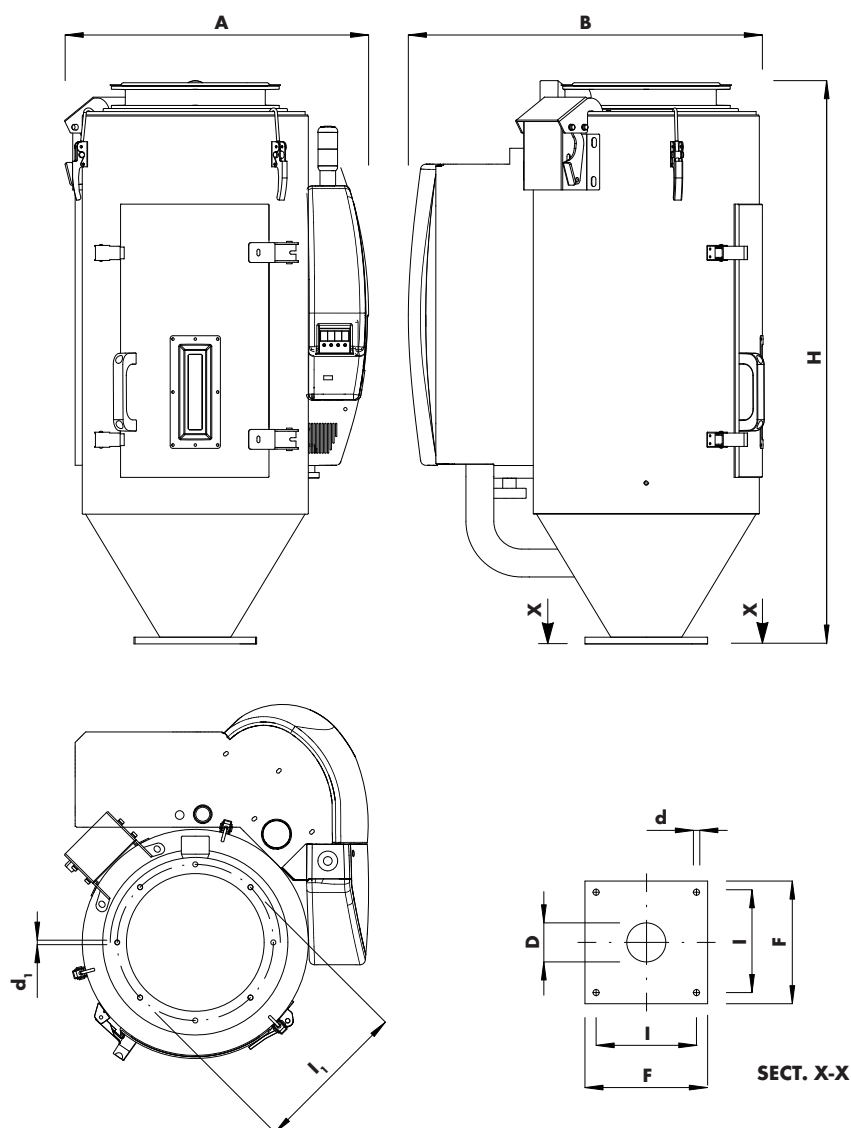

Dimensions

Model	A		B		H		D		F		I		d			I ₁		d ₁	
	mm	in	mm	in	mm	in	Ø mm	Ø in	mm	in	Ø mm	Ø in	n.	Ø mm	Ø in	Ø mm	Ø in	n.	Ø
XD15	557	21,9	674	26,5	997	39,3	70	2,8	220	8,7	180	7,1	4	11	0,43	280	11,0	4	M8
XD16	563	22,2	698	27,5	1070	42,1	70	2,8	220	8,7	180	7,1	4	11	0,43	280	11,0	4	M8
XD17	623	24,5	749	29,5	1137	44,8	70	2,8	220	8,7	180	7,1	4	11	0,43	280	11,0	4	M8
XD18	669	26,3	785	30,9	1378	54,3	70	2,8	220	8,7	180	7,1	4	11	0,43	280	11,0	4	M8