


GR GRINDERS

GR UNI - GR MULTI

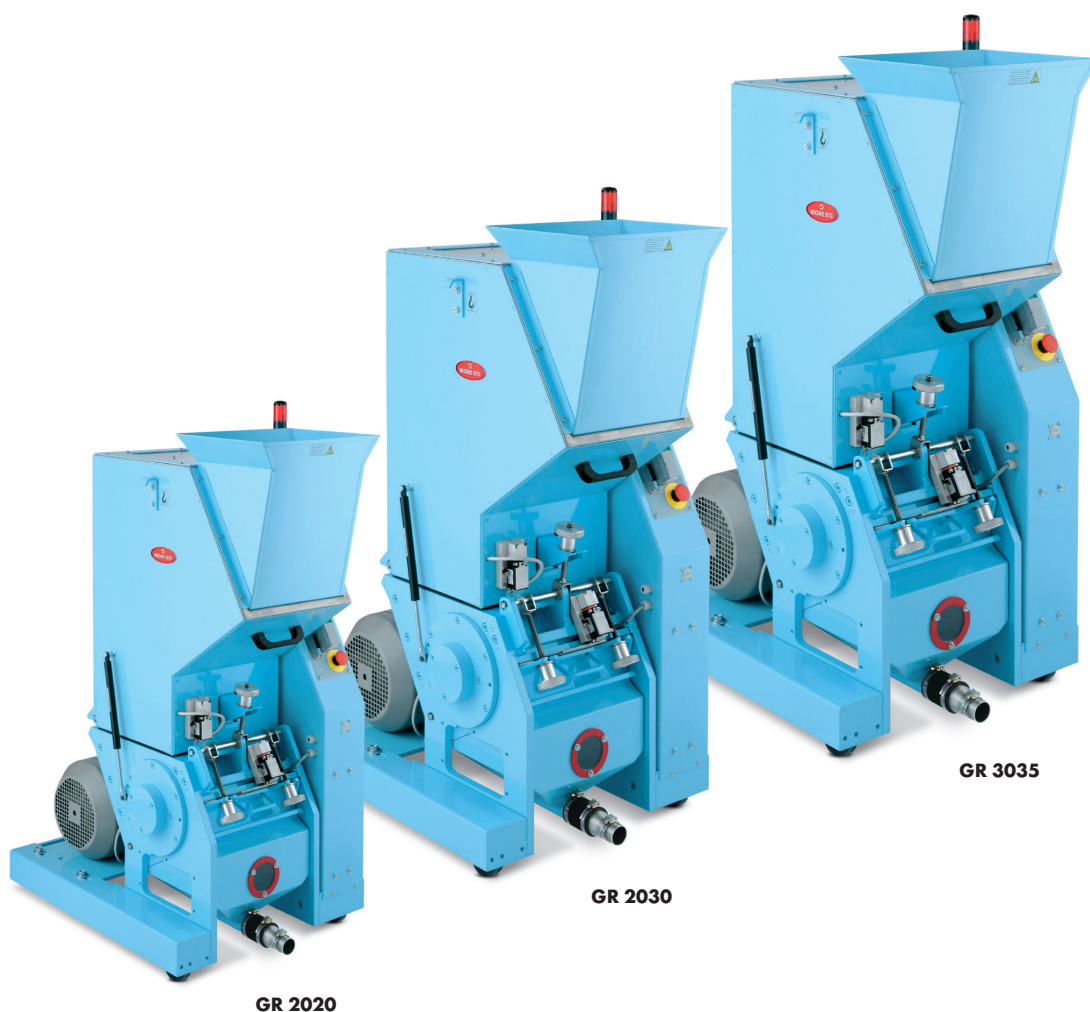

Technical specifications


Model	Feed inlet		Cutting chamber		Granulator motor		Rotating blades	Fixed blades	Noise level **	Throughput *		Material collector std.	
	mm	in	mm	in	kW	HP	N°	N°	dBA	kg/h	lb/h	dm ³	cft
GR 2020 U	270 x 300	10,6 x 11,8	200 x 215	7,9 x 8,5	1,5 - 2,2	2,0 - 2,9	3	2	< 80	30 - 50	29 - 110	7	0,25
GR 2030 U	370 x 300	14,6 x 11,8	300 x 215	11,8 x 8,5	3 - 4	4,0 - 5,4	3	2	< 80	40 - 80	88 - 176	11	0,39
GR 3035 U	425 x 360	16,7 x 14,2	350 x 285	13,8 x 11,2	5,5 - 7,5	7,4 - 10,0	3	2	< 80	100 - 180	220 - 397	18	0,63
GR 2020 M	270 x 300	10,6 x 11,8	200 x 215	7,9 x 8,5	1,5 - 2,2	2,0 - 2,9	12	2	< 80	30 - 50	29 - 110	7	0,25
GR 2030 M	370 x 300	14,6 x 11,8	300 x 215	11,8 x 8,5	3 - 4	4,0 - 5,4	18	2	< 80	40 - 80	88 - 176	11	0,39
GR 3035 M	425 x 360	16,7 x 14,2	350 x 285	13,8 x 11,2	5,5 - 7,5	7,4 - 10,0	15	2	< 80	100 - 180	220 - 397	18	0,63

* = Throughput is only a rough indication, depending on the used material, the way of feeding, the grid holes size, etc.

** = The noise of the granulator is due to a medium-size pressure with a cadenced granulator feeding.

GR GRINDERS

GR UNI - GR MULTI

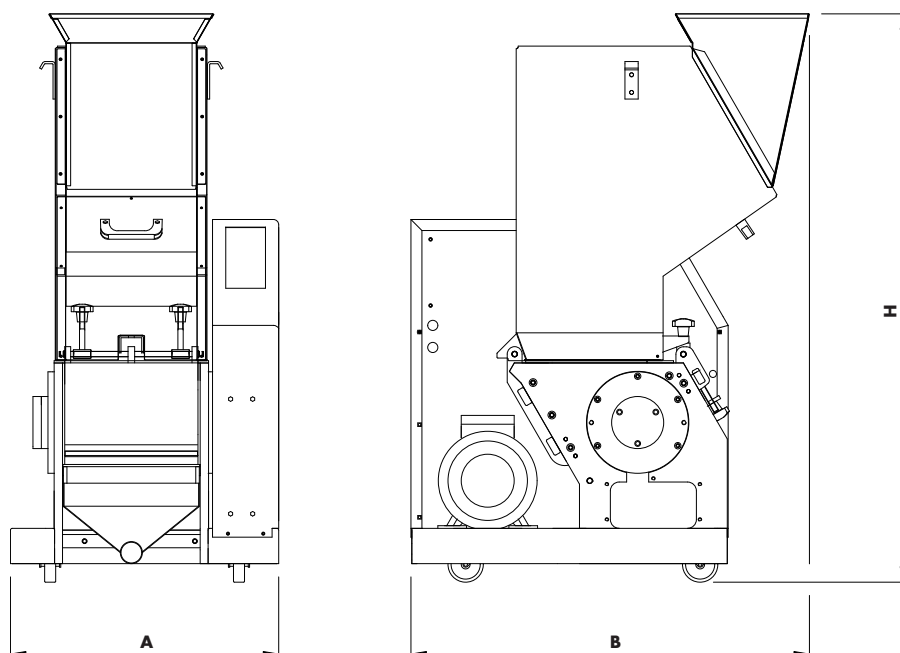

Applications

Model	Ratio Valve	Inclined screw	Cyclone fan	Enlarged drawer	Screen hole diameter ¹ [mm] / [in]					
	Mod.	Mod.	Mod.	Mod.	3 / 0,12	4 / 0,16	5 / 0,20	6 / 0,24	8 / 0,31	10 / 0,39
GR 2020	VP 20/20	CI 20/20	VC 20/20	CM 20/20		○	○	●	○	
GR 2030	VP 20/30	CI 20/30	VC 20/30	CM 20/30		○	○	●	○	
GR 3035	VP 30/35	CI 30/35	VC 30/35	CM 30/35			○	○	●	

1 = Screen is separately sold

○ = Recommended.

● = Standard

Dimensions

Model	Ratio Valve	Inclined screw	Cyclone fan	Enlarged drawer	A		B		H		Weight	
					mm	in	mm	in	mm	in	kg	lb
GR 2020 U	•	•	•	•	508	20	903	36	1288	51	260	573
GR 2030 U	•	•	•	•	608	24	903	36	1288	51	310	683
GR 3035 U	•	•	•	•	770	30	1120	44	1530	60	680	1499
GR 2020 M	•	•	•	•	508	20	903	36	1288	51	272	600
GR 2030 M	•	•	•	•	608	24	903	36	1288	51	328	723
GR 3035 M	•	•	•	•	770	30	1120	44	1530	60	695	1532